

CA-97 Polyurethane Accelerator

Description

Westcoat's CA-97 Polyurethane Accelerator can be used in EC-95G Gloss Polyurethane Topcoat and EC-95F Flat Polyurethane Topcoat to improve dry times.

Uses

CA-97 is used to speed up curing in Westcoat polyurethanes. It is typically used in cooler temperatures or when a faster turnaround is desired.

Advantages

Faster Cure • Increases Hardness

Product Data			
Packaging	4 oz bottle	Colors	Clear
Coverages	N/A	Mix Ratio	1 to 4 ounces per 1 gal kit of mixed polyurethane
VOC Content	0 gm/l	Shelf Life	2 years in unopened packaging

Inspection

Surface must be prepared in the proper manner that is required in the System Specification sheet for the desired polyurethane application.

Preparation

Refer to individual System Specification sheet prior to installation.

Mixing

Mix part A&B of the polyurethane together first, then add 1 to 4 ounces of CA-97 Polyurethane Accelerator per 1 gallon kit of polyurethane. Mix into polyurethane with a mechanical mixer until completely combined.


Coverage

Coverage will vary depending on the thickness of the chosen polyurethane product.

Application

Apply polyurethane as stated in the particular System Specification Sheet.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.

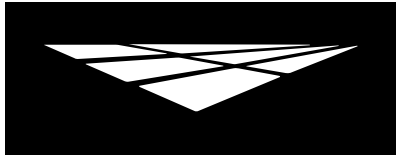

westcoat[®]
SPECIALTY COATING SYSTEMS

**PRODUCT
SPECIFICATION**

CA

ACCESSORIES
ADDITIVES & ACCESSORIES

CA-97 Polyurethane Accelerator

Dry Time

Dry times will decrease by 15-25% when 4 ounces of CA-97 Polyurethane Accelerator is added to a 1 gallon kit of polyurethane. Refer to System Specification Sheet for desired polyurethane, for initial dry times. Temperature and humidity will also affect dry times.

Clean Up

Uncured material can be removed with an environmentally-safe solvent. If cured, material can only be removed mechanically.

Limitations

- This product is designed for professional use only.
- Be sure to measure and mix properly. Be aware of the pot life of mixed polyurethane.
- Do not apply in temperatures below 50°F or above 70°F. Hot or cold weather may effect dry times.
- Do not use if the temperature is above 70°F.
- Not intended for use with any other polyurethane brands.
- Pot life of the EC-95G or EC-95F will be shortened by 5-8 minutes when using CA-97.
- It is strongly suggested that all limitations and attributes are disclosed to customer and end user.
- Do not use more CA-97 than recommended.

Health Precautions

Inhalation of vapor or mist can cause headache, nausea irritation of nose, throat, and lungs. Avoid breathing vapors, it is strongly recommended that respirators are worn. Prolonged or repeated skin contact can cause slight skin irritation. All epoxies have the potential of causing skin irritations or allergic reactions. Be careful not to get on skin, clothes or in eyes. Gloves are strongly recommended. If splashed in the eye, flush with warm water and contact a physician if blurring persists.

Solvent based products are extremely flammable, extinguish all pilot lights and sources of ignition such as electrical motors. Be sure to have adequate cross ventilation prior to installing.

Slip Precaution

Westcoat Specialty Coatings Systems highly recommends the use of a slip-resistant additive to all coatings/systems that may be exposed to wet, oily, greasy or slippery conditions. It is the end user's responsibility to provide a flooring system that meets current safety standards. Westcoat and its distributors will not be responsible for injury incurred during a slip and fall incident. For the current coefficient of friction requirements, please consult your local building codes.

DISCLAIMER: PURCHASER'S SOLE AND EXCLUSIVE REMEDY AGAINST THE MANUFACTURER OF WESTCOAT, SHALL BE LIMITED SOLELY TO THE REPLACEMENT OF ANY DEFECTIVE MATERIAL OR A PAYMENT BY THE MANUFACTURER IN AN AMOUNT EQUAL TO THE COST OF THE ORIGINAL MATERIAL.



4007 Lockridge St • San Diego, CA 92102
800-250-4519 • Fax 619-255-7187 • westcoat.com

2 of 2
CA-97 6/20